



Connector

NC3-MG-T50P-1

3.5mm Male

Features:

- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Instruments
- * Electronics

Electrical

Frequency:	DC~26.5GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min
Impedance:	50Ω

Mechanical



RF Connector:	3.5mm Male
Mating Cable:	NT50P
Outer Conductor:	303F stainless steel

How To Order

NC3-MG-T50P-1

Customization is available upon request.

Outline Drawings

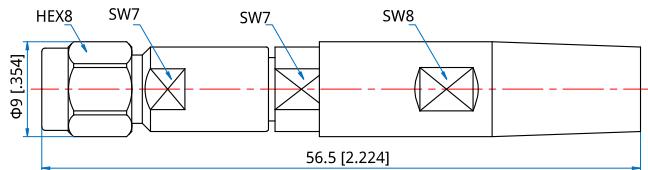

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]