

NPA-0.1-500-40-40
0.1~500MHz, 40dB, 40dBm

- | | |
|-------------------------|-------------------|
| Features: | Applications: |
| * Small Size | * Wireless |
| * Low Power Consumption | * Transmitter |
| | * Laboratory Test |

Electrical

Frequency:	0.1~500MHz
Gain:	40dB min.
Gain Flatness:	4±1dB max.
Input VSWR:	1.8 max.
Output Power (P1dB):	40dBm min.
Input Power:	2±1dBm +6dBm max.
Spurious:	-65dBc max.
Harmonic:	-10dBc max.
Voltage:	28~30V/5A VCC (Reference) +31V max.
Current:	2~3A max
Impedance:	50Ω

Mechanical


Size ^{*1} :	138.5*80*29.5mm 5.453*3.15*1.161in
RF Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole
Power Supply Interface ^{*2} :	Feed Through/Terminal Post

[1] Exclude connectors.
[2] Install heat sink during testing.

Environmental

Operating Temperature: -25~+55°C

Outline Drawings

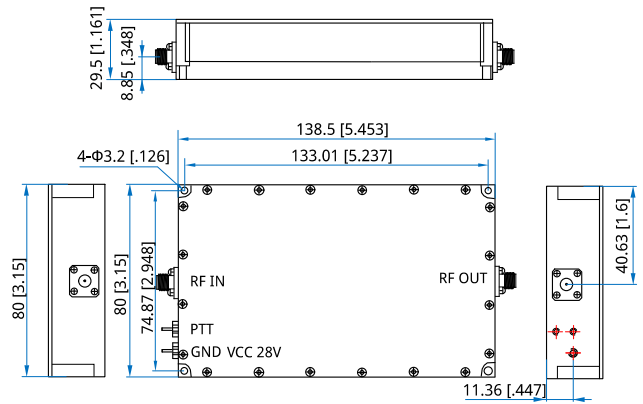

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order
NPA-0.1-500-40-40

